


Technical parameters			
1	Nominal heat output	kW	10
2	Nominal heat output on the water side	kW	
3	Pressure required	Pa	12
4	Average efficiency	%	80,1
5	Average flue gas temperature	°C	247
6	Wood consumption	kg/h	3,2
7	Consumption of combustion air	m <sup>3</sup> /hour	32
8	Emission of CO to 13% O <sub>2</sub>	%	0,1
9	Flue gas mass flow	g/s	10,1
10	Weight	kg	180
11	Required min. cross section for circulating air - INPUT	cm <sup>2</sup>	300
12	Required min. cross section for circulating air - OUTPUT	cm <sup>2</sup>	500
13	Three-component insulated chimney - active height 5m	Ø cm	180
14	character of building construction with fireplace insert	warm air convection	yes
		heat storage without conv.	yes


**Optional accessories**

Cover frame (KR)  
 Double glass (DS)  
 Double SM glass (DSM)  
 Black printed glass (SM)  
 External ashtray (VOP)  
 Segmental lining (SO)  
 Lower hearth (ZO)  
 Convection cover (DP)

Sizes		CHOPOK R90-S/330 (L/P) 670/440	CHOPOK R90-S/330 (L/P) 670/500	CHOPOK R90-S/330 (L/P) 670/560	
1	A	mm	670		
2	F	mm	1150	1210	1270
3	C	mm	470		
4	DN	Ø mm	180		
5	B	mm	440	500	560
6	FF	mm			
7	R	mm	330		
8	AA	mm			
9	H	mm			
10	J	mm	325 + /160/		
11	K	Ø mm	4x125		
12	L	Ø mm	100		
13	M	mm			
14	N	mm	50		

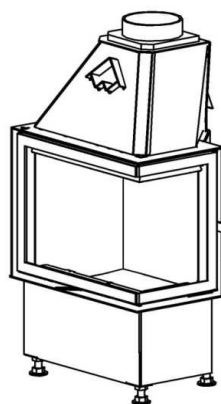

CHOPOK R90-S/330 P

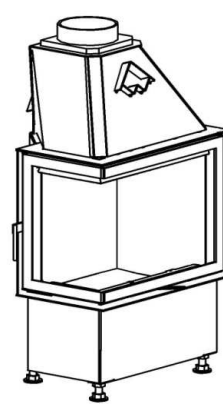

CHOPOK R90-S/330 L